

# Automotive Interior Adhesive Formulation for Better Rheological Performance



with **Borchi® Gel A LA**

Thickener for the Low Shear Range  APEO- and tin-free

Easy incorporation, good compatibility with excellent thickening efficiency, and improved storage stability




Adhesive Formulation			
Material	Function	Supplier	Dosage
Dispercoll® U 56	Resin	Covestro	90.00
DI Water	Solvent	Milliken lab	10.00
AMP 95	Neutralizer	Dow Chemical	0.05
<b>Borchi® Gel A LA</b>	Rheology Additive	Milliken	2.00
<b>Total</b>			<b>102.05</b>

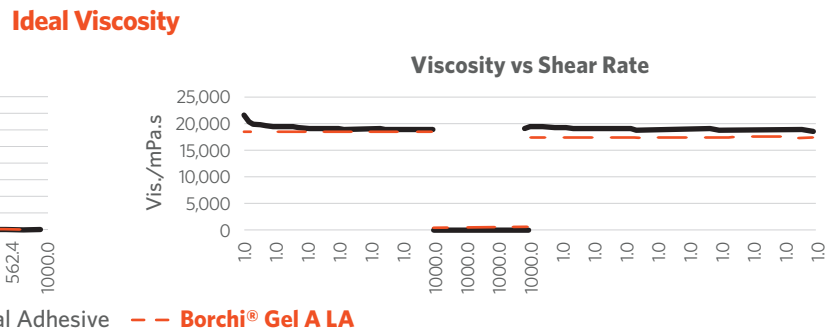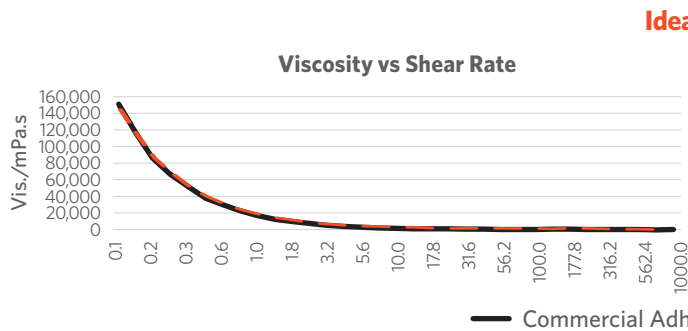

**Better Storage Stability**



**Reduced Spray Shots**

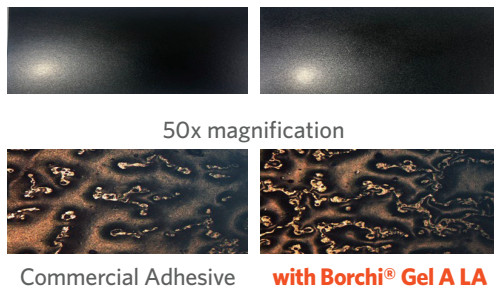

Order your sample at:  
[www.borchers.com/contact](http://www.borchers.com/contact)

PLEASE NOTE: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at [www.milliken.com/terms](http://www.milliken.com/terms) (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing.