

## Borchi® Dragon Low VOC

High-performance, low-VOC, cobalt-free metal-ligand catalyst that demonstrates excellent drying performance in solvent-based and high solids alkyd resins

### Physical Characteristics

Appearance	Brown to amber liquid
Viscosity	Max. 150 mPa·s (informative ISO 3219 (A) (20 °C))
Density	Approx. 0.93 g/cm <sup>3</sup> (informative) DIN 51757 (20 °C)

### Features

- Faster drying times particularly in long oil alkyds
- Allows for <350g/L alkyd formulation with higher oil content
- Fast drying in adverse ambient conditions down to 40 °F (4.4°C)
- Reduction in complexity of drier package in formulation
- No yellowing and brighter whites when compared to cobalt driers
- Provides wrinkle-free appearance when utilized with thick film applications

### Applications

- Coatings
  - Wood
  - Industrial
  - Protective and Marine
  - Architectural
  - Automotive

### Dosage


All resin systems are unique and will require the level of Borchi® Dragon Low VOC to be optimized for the best cost and dry performance. We recommend using a ladder study starting at 0.5 % up to 3 % of Borchi® Dragon Low VOC as supplied on resin solids. Optimized dosage must be determined as excessive Borchi® Dragon Low VOC could reverse dry performance. Borchi® Dragon Low VOC should be added as one of the last ingredients before the Anti-Skinning agent.

### Storage

Protect from the effects of weather and store at temperatures between 5 and 30 °C. Color of product varies on storage.

### Safety

Please refer to our safety data sheet for information relating to product safety.

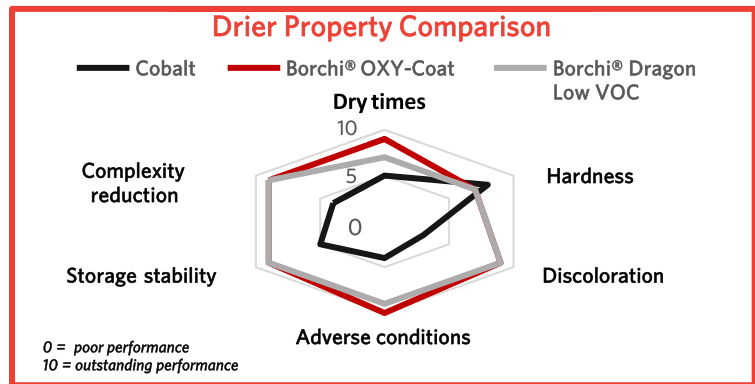

Material	VOC (ASTM D2369)	VOC (Directive 2004/42/EC)	Biobased Content
Borchi® Dragon Low VOC	2%	< 3%	~ 87%

[www.borchers.com/contact](http://www.borchers.com/contact)

PLEASE NOTE: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at [www.milliken.com/terms](http://www.milliken.com/terms) (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing.

Edition: 11/2024

Milliken