

# Excellent adhesion and substrate wetting in fast-curing polyaspartic coatings

## Borchi® GoI LA 50 substrate wetting agent


Post-added in ready-to-use, direct-to-metal polyaspartic coating



- Enhance adhesion and corrosion resistance for various metals with minimal influence on pot life
- Maintain optimal ambient curing and fewer needed coats for protection

### Improved Wet Adhesion

Cold Rolled Steel Substrate with Dull Matte Finish (ASTM B-117)

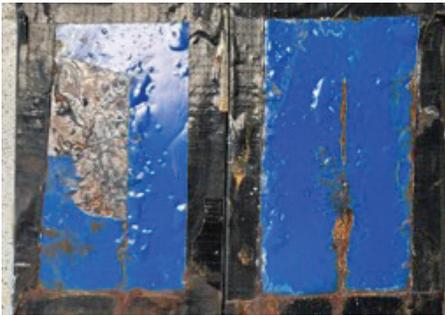

Control      2% Borchi® GoI LA 50

After 1600 hours in Q-Fog and 2 hours drying

### Enhanced Dry Adhesion


Cold Rolled Steel Substrate with Dull Matte Finish (ASTM B-117)



Control      2% Borchi® GoI LA 50


### Performance Attributes

Improved Adhesion on Over 25% of Tested Substrates

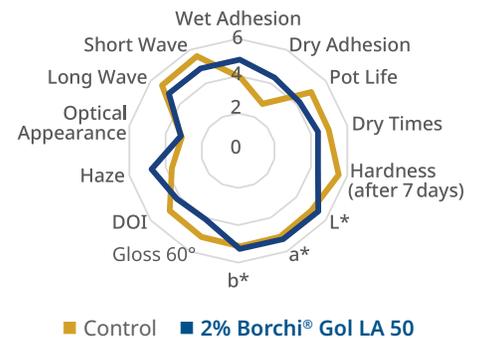

0=poor, 6=excellent

### Overall Additive Benefits

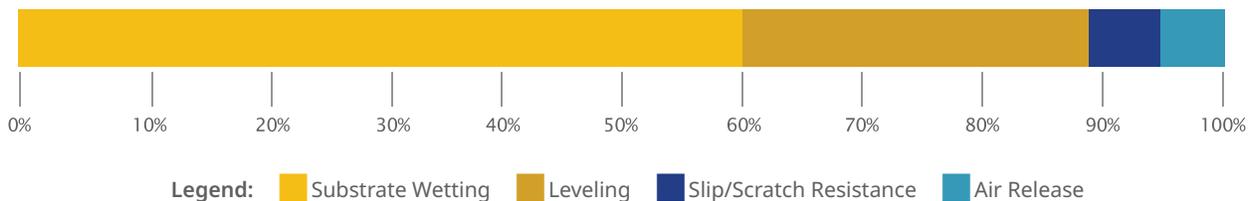

Legend: ■ Substrate Wetting ■ Leveling ■ Slip/Scratch Resistance ■ Air Release



For more information, please reach us at [borchers.com/contact](http://borchers.com/contact)

PLEASE NOTE: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at [www.milliken.com/terms](http://www.milliken.com/terms) (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing. Borchi is a trademark of Borchers Americas.