

High-Performance Catalyst


## Improve Performance and Sustainability in Trim Paints

### Borchi<sup>®</sup> OXY-Coat 1101

Tested in Multiple Formulations with Common USA Waterborne Alkyd Resins



### Performance Results in Short Oil, Medium Oil, Soybean Oil, and Polyurethane-Modified Waterborne Alkyd Resin Formulations

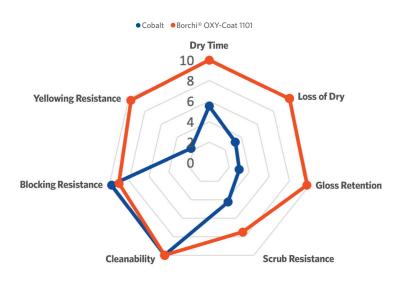

Average Results Across Four Formulations

 $\bigcirc$ 

Improved dry times and expanded application windows

73

Fast return to service when painting windows, doors, and trim



Improved durability of the trim, allowing the formula to expand into industrial applications



Easy cleaning of stains and improved scrub performance, enabling the surface to better withstand being cleaned




Superior ability to withstand direct sunlight, expanding use across the whole color space

borchers A MILLIKEN BRAND

2

# Significantly Improved Dry Time when Compared to Traditional Cobalt-Containing Drier Packages

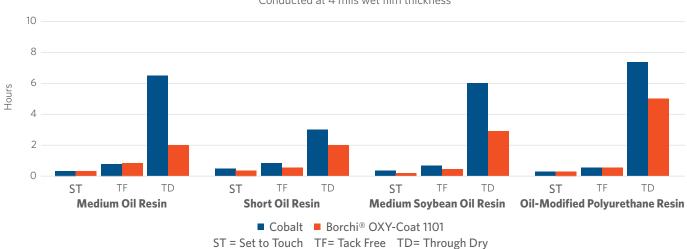

**Dry Time** @ 23°C 50% RH Conducted at 4 mils wet film thickness

### Improves Performance without Compromising Blocking

Excellent Blocking Allows Quick Return to Service when Painting Windows, Doors and Trim

### Better Blocking than 50% of the Leading Acrylic Trim Paint Brands

| Paint  | Blocking Performance |
|--|----------------------|
| Waterborne Alkyd Formula - Borchi® OXY-Coat 1101 | 9                    |
| Acrylic Trim Paint - Brand A                     | 7                    |
| Acrylic Trim Paint - Brand B                     | 3                    |
| Acrylic Trim Paint - Brand C                     | 9                    |
| Acrylic Trim Paint - Brand D                     | 10                   |





**CONTACT US TO LEARN MORE AND REQUEST THE COMPLETE DATA PACKAGE** 

### www.borchers.com/contact

PLEASE NOTE: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at www.milliken.com/terms (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing.

Milliken

BOC1101SUM-PKT-US-120122